



Intrerupator inteligent pentru jaluzele PNI SafeHome PT135J

Ghid rapid



EU/UK

1.Diagrama conexiuni

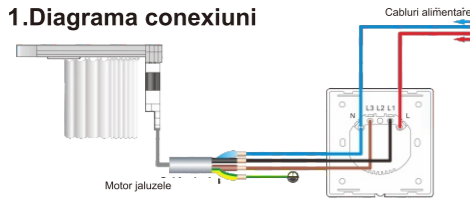


2. Specificatii

Alimentare: AC110-240V(50/60Hz)
Putere: 600W
Purent maxim: 10A
Putere de varf: 2400W
Consum in standby: 0.1mA
Frecventa WiFi: 2.4 GHz
Putere de emisie: 100mW
Distanța de comunicare WiFi: 30 metri (la interior)
Material: ABS rezistent la foc


3. Instalare aplicatie

Scanati codul QR de mai jos sau cautati "Tuya Smart" sau "Smart Life" in Apple Store sau Google Play.



Introduceti numele de utilizator si parola pentru autentificare. Daca nu aveti un cont, inregistrati-va mai intai. Puteti introduce numarul de telefon sau adresa de email ca nume de utilizator.

Apasati "Next" pentru a primi codul prin SMS. Introduceti parola dorita. Apasati pe "Confirm" pentru a finaliza inregistrarea.

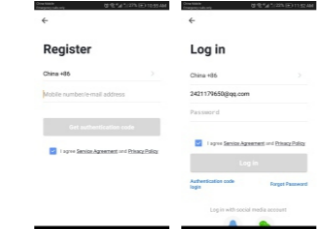


4. Adaugare dispozitiv in aplicatie

- Conectati telefonul la rețeaua WiFi
- Tineti apasata tasta "Up" pe intrerupator aprox. 20 sec. pana cand indicatorul LED clipeste rapid
- In aplicatie, apasati pictograma "+" Selectati "Wall Switch"
- Introduceti parola rețelei WiFi
- Așteptati configurarea cu succes.


5. Control din aplicatie

Dupa configurarea cu succes, puteti controla intrerupatorul direct din aplicatie. Puteti deschide sau inchide jaluzele.

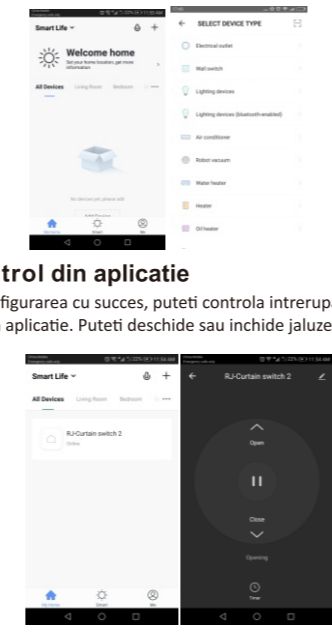


6. Setare Timer (temporizator)

Puteti set un program pentru deschiderea/inchiderea jaluzelelor.

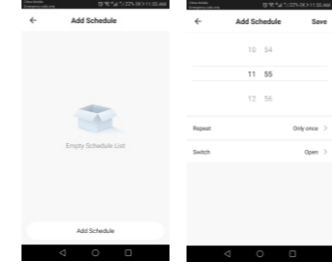

9. Control din Amazon Alexa

Deschideti "Amazon Alexa". Accesati "Home" și selectati "Skills". Introduceți "Smart Life" in bara de cautare. Apasati "Enable" pentru a o adauga. Accesati aplicatia "Smart Life" Apasati pe "Link Now" pentru a continua. Dupa conectarea cu succes a celor doua aplicatii, inchideti aplicatia Smart Life si deschideti aplicatia Amazon Alexa.

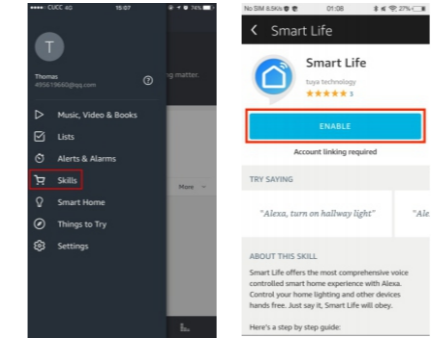


Apasati pe "Smart Home", selectati "Devices" apoi apasati "Discover". Alexa va descoperi dispozitivele. Dupa 20 sec. dispozitivele vor aparea in lista.

Acum puteti folosi Alexa pentru a controla intrerupatorul: "Alexa, turn on/off bedroom curtain."

10. Control din Google Home

Deschideti "Google Home" sau "Google Assistant". Accesati "Home" și selectati "Home Control". Apasati "+" din colțul dreapta jos. Gasiti "Smart Life" in lista "Add devices"

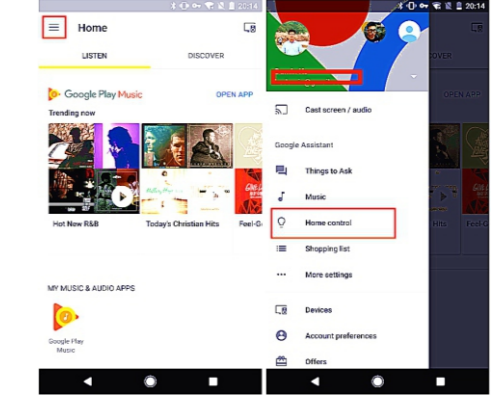


Acum puteti folosi Google Home pentru a controla intrerupatorul: "Ok, Google, turn on/off bedroom curtain..".

Declaratie UE de conformitate simplificata
SC ONLINESHOP SRL declara ca **Intrerupator inteligent pentru jaluzele cu touch PNI SafeHome PT135J** este in conformitate cu Directiva RED 2014/53/UE. Textul integral al declaratiei UE de conformitate este disponibil la urmatoarea adresa de internet: <https://www.mypni.eu/products/7258/download/certifications>


WIFI Curtain Switch PNI SafeHome PT135J

User Guide



EU/UK

1. Wiring Diagram

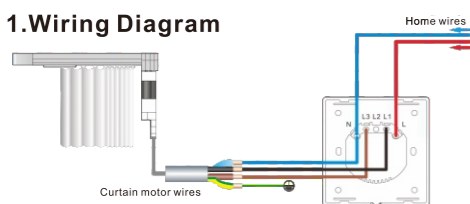


2. Specification

*Working Voltage: AC110-240V(50/60Hz)
*Normal Load Power: 600W
*Maximum peak current: 10A
*Maximum peak power: 2400W
*Standby consumption: 0.1mA
*Wireless frequency: 2.4 GHz
*Wireless Range: 30 Meters (Indoor)
* WiFi transmission power: 100mW
*Material: ABS flame retardant


3. Download and Install App

Use your phone to scan the QR code below or search "Smart Life" from Apple store or Google play to download the APP.



Input account name and password to log in. If you don't have an account, please register an account first. System will identify your country automatically. You can use your mobile phone number or Email address as your account name.

Tap on "Next" to get a verification code via SMS on your mobile phone. Enter a desired password. Tap on "Confirm" to finish your registration.

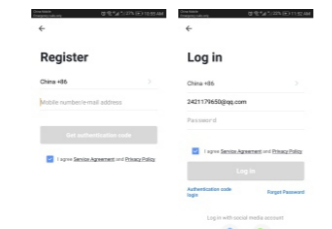


4. Add New Device

- Connect your phone to local wifi first
- Press and hold the "Up" key for 20 seconds until the indicator light flashes quickly
- On the Smart Life APP, tap on "+" in homepage Select "Wall Switch"
- Input wifi password and confirm
- Wait for successful configuration


5. Control on App

After successful configuration, you can control the curtain switch on the App. You can open/close the curtain.

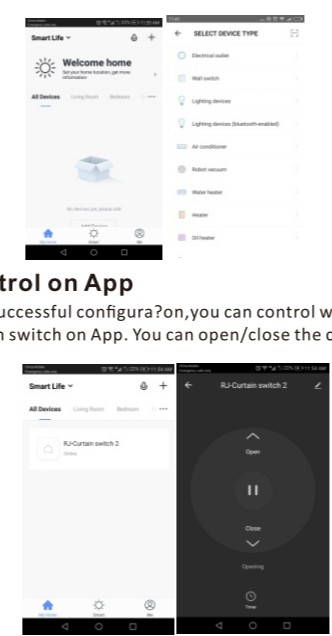


6. Set Timer

You can set a schedule to open/close your curtain.

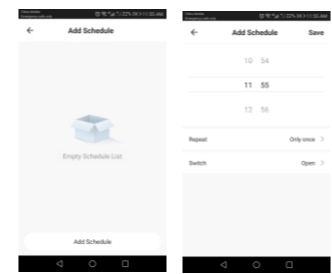

9. How to control device by Amazon Alexa

Open the "Amazon Alexa" APP. Go to "Home" and select "Skills". Input "Smart Life" in the search bar. Tap on "Enable" to add the skill. Enter your "Smart Life" APP account name and password. Then tap on "Link Now" to confirm. After the link succeeds, close the window and go back to the Alexa APP.

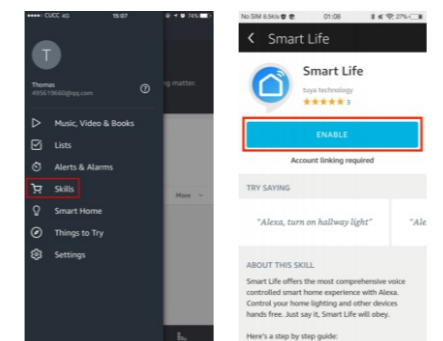


Tap on "Smart Home", select "Devices" and then tap on "Discover". Alexa will discover devices. After about 20 seconds, the devices will show in the list.

Now you can use your Alexa to voice control your Smart devices. "Alexa, turn on/off bedroom curtain."

10. How to control device by Google Home

Open the "Google Home" or "Google Assistant" APP. Go to "Home" and select "Home Control". Tap on "+" on the lower right corner to add skill. You can find "Smart Life" in "Add devices" list.

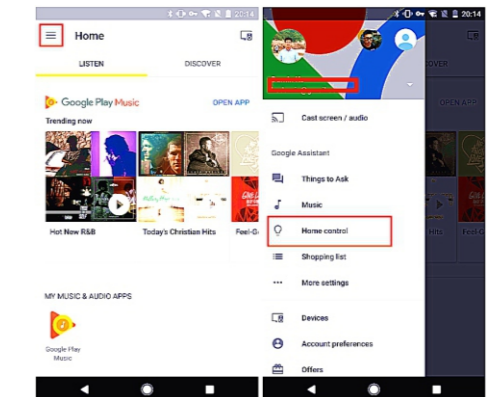

Now you can use your Google Home to voice control your Smart devices. "Ok, Google, turn on/off bedroom curtain..".

Simplified EU declaration of conformity
SC ONLINESHOP SRL declares that **Smart Switch for curtains PNI SafeHome PT135J** is in accordance with RED Directive 2014/53/EU. The full text of the EU declaration of compliance is available at the following internet address: <https://www.mypni.eu/products/7258/download/certifications>